

# Distributor MPD24 for Surface Mounting

Telegärtner now offers a new series of its Modular Patch Distributors MPD24 with up to 24 ports for surface mounting. The MPD24 distributor is either available as a modular version for installation with Telegärtner's shielded or unshielded keystone jacks (series AMJ-S Modules, AMJ Modules K, UMJ Modules K) or as a version with IDC termination and fully-

compensated RJ45 jacks rated Category 6<sub>A</sub> (IEC 60603-7-51). The easy-to-install metal chassis enables users the installation of a structured cabling systems without the need for additional racks or distributors. Networks in doctor's or lawyer's offices, residential establishments, small offices and at home can be set up in a cost-effective manner.


## Distributor MPD24 AMJ/UMJ

### Technical Datas

Housing base plate	sheet steel zinc plated
Housing cover	varnished pure white, RAL 9010
Frontplate	sheet steel zinc plated
Ground cable AWG11 with terminal	E-Cu-braid with flexible PVC insulation, tin plated
Directive 2011/65/EU	RoHS-compliant

### Performance Characteristics

- Wall- / surface mounting; housing base with plaster compensation
- For the installation, cover can be locked or removed (tool-less)
- cable strain relief by means of cable tie
- Cable management can be retrofitted (Order no.: H01011A0048)
- Dustproof cable entry with brush strip

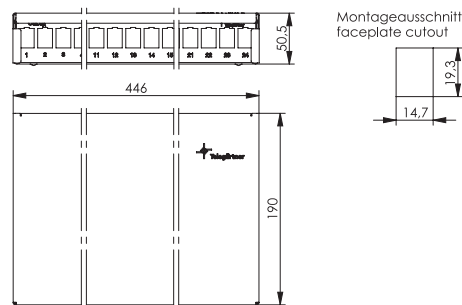

Order no.	Description	Remarks	Colour
H02025A0260	MPD24 AMJ/UMJ	24 Ports; for AMJ-S Module, AMJ Module K, AMJ Coupler K, UMJ Module K, UMJ Coupler K	pure white RAL 9010


## Modular Patch Distributor MPD24-HS K Cat.6<sub>A</sub>

### Technical Datas

Housing base plate	Sheet steel zinc plated
Housing cover	varnished pure white, RAL 9010
Cover	stainless sheet steel
PoE+	acc. to IEEE 802.3 at
Category 6 <sub>A</sub>	ISO/IEC 11801, DIN EN 50173-1
10 Gigabit Ethernet	acc. to IEEE 802.3 an

### Performance Characteristics

- Wall- / surface mounting; housing base with plaster compensation
- For the installation, cover can be locked or removed (tool-less)
- cable strain relief by means of cable tie
- Dustproof cable entry with brush strip
- 360° shielding can be connected directly on the PCB using screw clamps

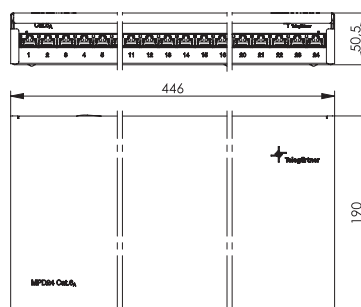

Order no.	Description	Remarks	Colour
J02023A0053	MPD24-HS K Cat.6 <sub>A</sub>	incl. cable management; termination via IDC (LSA Plus) terminals with colour coding acc. to T568A and B	pure white RAL 9010